

Hexagonal DRA with Complementary E-Shaped DGS for Mutual Coupling Reduction

D.Himaja, N.Ramadevi, B.Jyothirmai, K.Naga priyanka.

Department of Electronics and Communication Engineering, Bapatla Women's Engineering College, Bapatla-522101, Guntur District, Andhra Pradesh, India.

Abstract

A complementary E-shaped ground plane structure which can reduce mutual coupling between two hexagonal dielectric resonator antennas is proposed in this paper. The antennas are operating at resonant frequency 12.59 GHz. Using ROGERS substrate with Alumina (99.5%) lossy as DRA material, the proposed antenna is designed. The proposed design has improved its performance in parameters like bandwidth, VSWR and gain at resonant frequency and working frequency is in the range of 11-14 GHz. It provides mutual coupling reduction up to 21.76 dB and return loss of -37.44 dB at a frequency of 12.59 GHz. The proposed antenna is used in satellite communications and radar applications.

Keywords: Complementary E-shaped DGS (defected ground structure), mutual coupling, DRA (dielectric resonator antenna), VSWR (voltage standing wave ratio), Band width.

INTRODUCTION:

The field of wireless communication has been undergoing a revolutionary change in the past decades. The main component required for wireless communication is antenna. In the last two decades, the investigation is carried on microstrip patch antenna and DRA. For enhancing the bandwidth and gain DRA is considered. DRA'S were first proposed in 1980's. DRA provides advantages of small size, light weight, low profile, high radiation efficiency and low cost. Though different shapes of DRA'S were investigated, but hexagonal DRA has high radiation efficiency and low return loss of greater than -30 dB.

MIMO antenna is used for improving the channel capacity. For MIMO system, DGS is one of the techniques to reduce mutual coupling between arrays of antennas. For an effective MIMO system mutual coupling between antennas should be low. DGS can be obtained by introducing a slot or defect on the ground plane. Thus the distribution of surface current depends on the shape and dimensions of the slot. It also controls the excitation and electromagnetic waves that propagate through the surface layer. The bandwidth depends on the material permittivity. Higher permittivity results in size reduction and narrow bandwidth and lower permittivity broadens the bandwidth. DGS have been used in filters, coplanar wave guides, microwave amplifiers and suppressing the higher order harmonics.

This paper introduces a complementary E-shaped DGS for mutual coupling reductions and unwanted cross polarization.

In this, the effects of DGS to the different DRA parameters are studied.

ANTENNA CONFIGURATION:

The proposed design consists of array of antennas with hexagonal DRA and a complementary E-shaped defect etched on the ground plane. The antenna is excited with the side fed Micro strip feed.

The material and the dimensions are taken such that it operates in frequency 11-14 GHz. The schematic diagram of proposed design is shown in Fig (a).

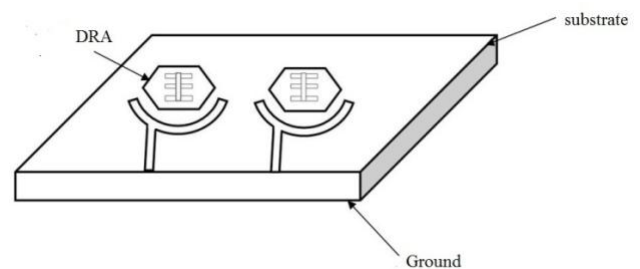


Figure (a): Schematic diagram of proposed design

The dimensions proposed antenna as follows:

Design parameters	Dimensions	Materials used
Substrate	$L_s * W_s * H_s$ 20*20*1.5 (mm ³)	Roggers RO3010 (lossy)
Ground	$L_g * W_g * H_g$ 20*20*0.1 (mm ³)	Copper annealed
DRA (hexagonal)	Outer radius: 10 Inner radius: 0	Alumina (99.5%) lossy
Feed (ring shaped)	Outer radius: 13 Inner radius: 11	Copper annealed
Side fed (microstrip line)	2*12*5 (mm ³) $L_f * W_f * H_f$	Copper

Alumina (Al₂O₃) 99.5 % lossy with epsilon 9.9(ε_r = 9.9) and tan δ=0.0001 is used to design hexagonal DRA. ROGERS RO3010 (lossy) with epsilon 10.2 (ε_r= 10.2) and tan δ=0.0022 is used as substrate. Copper (annealed) is used for designing both ground plane and feed.




Figure (b): Schematic diagram of complementary E-shaped DGS.

DGS is used as a band pass filter and the resonant frequency for E-shaped DGS is given by

$$f_r = \frac{V_0}{2L_{eff}\sqrt{\epsilon_{eff}}}$$

The resonant frequency of micro strip line is calculated by the following equation

$$f_r = \frac{V_0}{2L_{eff}} \sqrt{\frac{2}{\epsilon_r \text{sub} + 1}}$$

V₀ =velocity of light

RESULTS AND DISCUSSION:

Thus the mutual coupling between the two hexagonal DRA is reduced by incorporating a E-shaped DGS on the ground plane. Thus it's provides a mutual coupling up to -20.40db as shown in below:

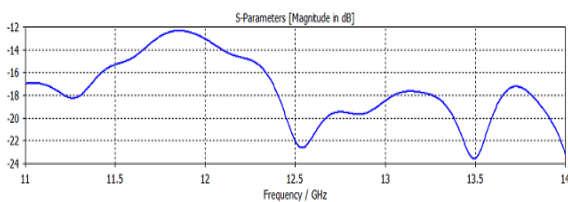


Figure (e): Mutual Coupling Plot (S₁₂)

Return losses of -46.18db. As the coupling between the two antennas is reduced and the antennas works more efficient as shown below.

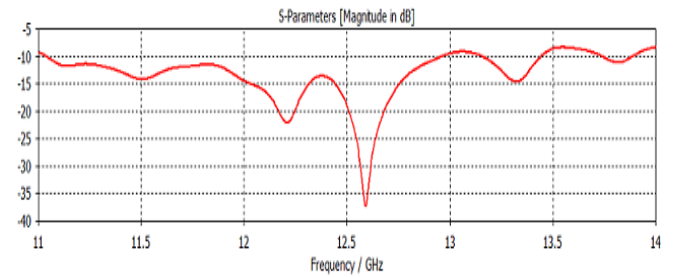


Figure (d): Return Loss Plot(S₁₁)

Thus the Bandwidth is used for enhancing the gain. The Bandwidth is calculated by using the formula

$$\frac{f_h - f_l}{f_r} * 100$$

From the design the obtained Bandwidth will be 15.55%.

The voltage standing wave ratio is observed from result, shown in below fig.

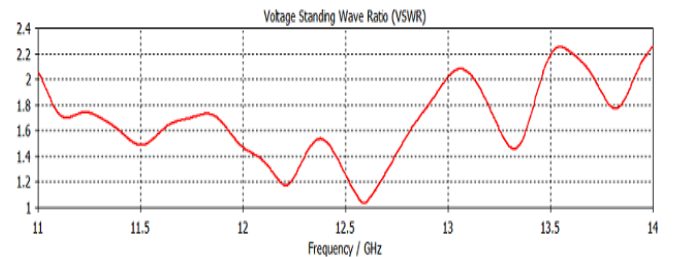


Figure (e): VSWR Plot

Antenna's Power gain is a key performance number which combines the antenna's directivity and electrical efficiency. The gain obtained is 9.99 as shown in the Fig(f)

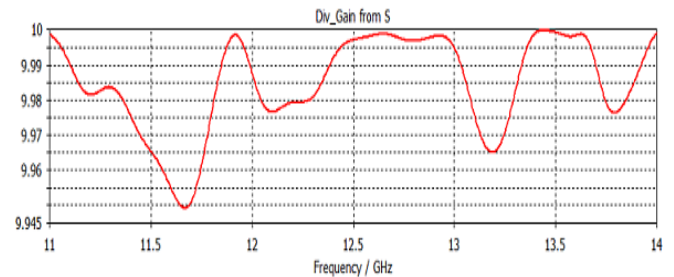


Figure (f) : Gain Plot

A great way to improve wireless throughput is to move to a MIMO system(multiple input multiple output). That means you have a radio capable of transmitting and receiving multiple data streams simultaneously. The Envelope correlation coefficient plot at resonant frequency is shown in fig (g).

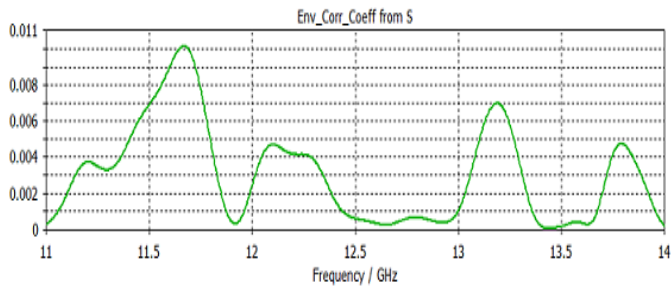


Figure g: Envelope correlation coefficient plot

Microwave Opt. Technol.Lett., vol. 34, no. 3, pp. 169-172, Aug. 2002.

- [9]. Lim, J.-S., Y.-T. Lee, C.-S. Kim, et al., "A vertically periodic defected ground structure and its application in reducing the size of microwave circuits," *IEEE Microwave Compon. Lett.*, Vol. 12, No. 12, 479-481, 2002.
- [10]. F. Yang, Z. X. Xia, Y. X. Ye, and Y. R. Samii, "Wide-band E-shaped patch antennas for wireless communications," *IEEE Trans. Antennas Propagate.*, vol. 49, pp. 1094-1100, July 2001.

CONCLUSION:

Thus the mutual coupling reduction between two hexagonal DRA's is reduced by incorporating a complementary E-Shaped DGS etched on ground plane. Thus the obtained resonant frequency is used in satellite communication at Earth Station Antenna.

REFERENCES

- [1]. F.Dong, L.Xu, W.Lin, and T.Zhang,"A compact DRA with Enhanced Gain and Cross-polarization," *International Journal of Antennas and Propagation*, vol.2017, pp.1-8,2017.
- [2]. S.K.K.Dash, T.Khan, and A.De,"*Dielectric resonator antennas using numerical methods: a review*," *Journal of microwave power and Electromagnetic Energy*, vol.50no.4, pp.269-293,2016.
- [3]. M. R. Nikkhah, A. A. Kishk, and J. Rashed-Mohassel, "Wideband DRA array placed on array of slot windows," *Institute of Electrical and Electronics Engineers. Transactions on Antennas and Propagation*, vol. 63, no. 12, pp. 5382-5390, 2015.
- [4]. M. Esa, U. Jamaluddin, and M. S. Awang, "Antenna with DGS for improved performance," *Proceedings of IEEE Asia-Pacific Conference on Applied Electromagnetics*, 2010.
- [5]. Oskouei, H. D., K. Forooghi, and M. Hakkak, "Guided and leaky wave characteristics of periodic defected ground structures," *Progress In Electromagnetics Research*, PIER 73, 15-27, 2007.
- [6]. Mandal, M. K. and S. Sanyal, "A novel defected ground structure for planar circuits," *IEEE Microwave Compon. Lett.*, Vol. 16, No. 2, 93-95, 2006.
- [7]. J. S. Lim, J. S. Park, Y. T. Lee, D. Ahn, and S. Nam, "An application of defected ground structure in reducing the size of amplifiers," *IEEE Microwave Wireless Components Letters*, vol. 12, no. 7, pp. 261-263, March 2002.
- [8]. J. Haley, T. Moore, and J. T. Bernhard, "Experimental investigation of antenna handset-feed interaction during wireless product testing,"