

Frequency and Power Allocation of OFDM Systems with proportional rate constraints

R. Raja Kumar

*Professor, Department of Mathematics,
Sathyabama University, Chennai-600119, India.*

Abstract

A two-step solution to the problem of finding the sub-channel and power allocation that maximizes the energy efficiency of the OFDMA based transmissions from a base station, under proportional rate and total power constraints, is presented. A low complexity sub-channel assignment is followed by an optimal power allocation that is obtained via a single non-linear equation. The proposed algorithm has the same computational complexity as the best algorithm in the literature for the same problem but with minimum rate constraints. While the convergence of the algorithm in the literature is not guaranteed, the algorithm in this paper is proven to converge. Simulation results show that the proposed algorithm out-performs the one in the literature when the rate constraints are ignored.

Keywords: OFDMA, energy efficiency.

Introduction

The need to reduce the global footprint of mobile communications together with the increasing demand for the data rates has necessitated research into the energy efficiency of the transmissions from base stations [1], [2]. Finding the power and frequency allocation that maximize the bits/Joule/Hz energy efficiency (EE) of transmissions has proven to be difficult because EE is not concave in the powers, and the channel allocation in orthogonal frequency division multiple access (OFDMA) is computationally challenging. Parametrized convex programming [3], Charnes-Cooper transformation [4], and bi-level optimization [5], [6] have been proposed to deal with power allocation. Heuristic approaches have been suggested for the channel allocation. However, none of the algorithms proposed to solve the problem has been proven to converge [6]. This raises questions about their utility in practical systems with widely varying channel conditions. It should be noted that there are very efficient

algorithms for solving related EE problems in the medium access (MAC) layer [7], but these algorithms do not maximize the EE at the physical layer. This letter presents a two-step solution to the problem of finding the sub-channel and power allocation that maximizes the EE of OFDMA based transmissions from a base station. Proportional rate constraints rather than minimum rate constraints are used because of the following reason. It is known that the power allocation that maximizes the energy efficiency produces relatively low data rates [2]- [7] compared to throughput maximizing power allocation under a total power constraint. This shows that a power allocation procedure that satisfies users minimum rate demands will produce a power allocation that is far from the un-constraint optimal energy efficient power allocation. In other words, forcing the users to accept proportional rates, instead of minimum rate demands will produce transmissions at a higher energy efficiency. Proportional rate constraints can also be mapped in to proportional delay constraints in case of saturated traffic scenarios. The solution to the problem is obtained using an algorithm that is guaranteed to converge. It has the same complexity as the best algorithm in the literature [6] with minimum rate constraints, and out-performs that algorithm in simulations when the rate constraints are ignored.

Section II formulates the optimization problem. The analysis and the solution are presented in Section III, the numerical results in Section IV, and the conclusion in Section V.

System Model and the Optimization Problem

Consider the downlink of a single cell with N users and K orthogonal sub-channels. Each sub-channel is assigned exclusively to one user. If the channel gain on the k th sub-channel is h_k , the transmission power p_k , the noise spectral density σ , and $h_k = h_k/\sigma$, then the system EE of the transmissions overall K sub-channels in bits/Joule/Hz can be written as:

$$EE = \frac{\sum_{k=1}^K \log_2(1 + h_k p_k)}{p_c + \eta \sum_{k=1}^K p_k}, \quad (1)$$

Where η is the reciprocal of the efficiency and p_c is the circuit power [6] of the downlink transmitter. Assume a yet to be determined sub-channel assignment protocol is used to distribute the sub-channels among the users. Suppose a total of K_1 sub-channels – sub-channel 1 through sub-channel k_1 - are assigned to User-1. A total of K_2 sub-channels – sub-channel $k_1 + 1$ through sub-channel k_2 - are assigned to User-2 and so on. A total of K_n sub-channels – sub-channel $k_{n-1} + 1$ through sub-channel k_n - are assigned to User- n . Then the rate r_n of User- n can be written as:

$$r_n = \sum_{k=k_{n-1}+1}^{k_n} \log_2(1 + h_k p_k), \quad (2)$$

Where $k_0 = 0$. Suppose the rate demand of User- n is α_n times that of User-1.

In other words, the proportional rate demands are given by

$$\alpha_{n+1} r_1 - r_{n+1} = 0 \text{ for } n = 1, 2, \dots, N-1. \quad (3)$$

The goal is to maximize the EE in (1) subject to (3) and a total power constraint PT using a two-step optimization procedure - first proposing a sub-channel assignment protocol and then solving the following power allocation problem:

$$\begin{aligned}
 & \max_{p_1, p_2, \dots, p_K} EE \\
 & \text{subject to} \\
 & \text{C1 : } \alpha_{n+1}r_1 - r_{n+1} = 0 \text{ for } n = 1, 2, \dots, N - 1. \\
 & \text{C2 : } P_T - \sum_{k=1}^K p_k \geq 0.
 \end{aligned} \tag{4}$$

Analysis and Solution

The computational complexity of an optimal channel assignment protocol would prevent it from being useful in practice. Because of this, we first present a low complexity channel assignment protocol. Then we analyse the power allocation problem and propose a power allocation procedure.

A. Channel Assignment

It is straight forward to prove that the EE of the single user system is directly proportional to its channel gain. This suggests one should assign each sub-channel to the user with the largest gain on that sub-channel. However, this may leave some users with no sub-channels at all. On the other hand, from a fairness point of view, one might want to assign each user the sub-channel for which this user has the greatest channel gain. We take an approach that balances these two perspectives.

The Channel Assignment Protocol

- 1) Re-label the users in the descending order of their proportional rate demands.
- 2) While (there are sub-channels left to assign)
- 3) for each user
- 4) Assign the sub-channel in which it has the largest gain.
- 5) End for
- 6) for each user
- 7) Assign a sub-channel if that user happens to have the largest gain on that sub channel.
- 8) End for
- 9) End while

B. Power Allocation

Having assigned the subchannels using the protocol given above, we set out to solve the optimization problem in (4). The objective function in (4) is not concave in the powers. However, since the numerator is positive and concave, and the denominator is positive and affine, (4) is a concave fractional program that can be transformed into a concave program using a transformation proposed by Charnes and Cooper [8].

C. Charnes-Cooper Transformation (CCT):

The concave fractional program $\max\{N(\mathbf{x})/D(\mathbf{x}) \mid M(\mathbf{x}) \geq 0, L(\mathbf{x}) = 0\}$ reduces to the concave program $\max\{tN(\mathbf{y}/t) \mid tM(\mathbf{y}/t) \geq 0, L(\mathbf{x}) = 0, tD(\mathbf{y}/t) = 1, t > 0\}$, under the transformation $t = 1/D(\mathbf{x}), \mathbf{x} = \mathbf{y}/t$.

The substitution $p_k = y_k/t$ for all $k, t = 1/(p_c + \eta \sum p_k)$ reduces (4) to a standard concave maximization problem:

$$\begin{aligned} \max_{y, t} \quad & f(y, t) = t \sum_{k=1}^K \log_2(1 + h_k y_k/t) \\ \text{subject to} \quad & \\ \text{C1 : } \quad & \alpha_{n+1} \sum_{k=1}^{k_1} \log_2(1 + h_k y_k/t) \\ & - \sum_{k=k_n+1}^{k_{n+1}} \log_2(1 + h_k y_k/t) = 0, \\ & \text{for } n = 1, 2, \dots, N - 1. \\ \text{C2 : } \quad & tP_T - \sum_{k=1}^K y_k \geq 0 \quad \text{C3 : } \eta \sum_{k=1}^K y_k + p_c t - 1 = 0, t > 0 \end{aligned} \tag{5}$$

Henceforth, as the first line above indicates, the objective function will be referred to by f . The Lagrangian is:

$$\begin{aligned} L(y, t, \lambda, \mu) &= f + \lambda \left[\eta \sum_{k=1}^K y_k + p_c t - 1 \right] + \gamma \left[tP_T - \sum_{k=1}^K y_k \right] \\ &+ \sum_{n=1}^{N-1} \mu_n [\alpha_{n+1} r_1 - r_{n+1}], \end{aligned} \tag{6}$$

Where λ, γ and μ_n are the dual variables. Since (5) is a standard concave problem, the KKT conditions [9] are necessary and sufficient for optimality. These conditions are listed below, where l is used to denote $\ln 2$ and q_k for $h_k p_k / (1 + h_k p_k)$. The first three equations result from the constraints and the rest from the derivatives.

$$\alpha_{n+1} \sum_{k=1}^{k_1} \log_2(1 + h_k p_k) = \sum_{k=k_n+1}^{k_{n+1}} \log_2(1 + h_k p_k), \tag{7}$$

for $n = 1, 2, 3, \dots, N - 1$.

$$\gamma \left[tP_T - \sum_{k=1}^K y_k \right] = 0, \quad tP_T - \sum_{k=1}^K y_k \geq 0, \quad \gamma \geq 0 \tag{8}$$

$$\eta \sum_k y_k + p_c t - 1 = 0 \tag{9}$$

$$\begin{aligned} \sum_{k=1}^K (l \log_2(1 + h_k p_k) - q_k) - \frac{1}{t} \sum_{n=1}^{N-1} \mu_n \alpha_{n+1} \sum_{k=1}^{k_1} q_k \\ + \frac{\mu_1}{t} \sum_{k=k_1+1}^{k_2} q_k + \dots \end{aligned} \tag{10}$$

$$\left(1 + \frac{1}{t} \sum_{n=1}^{N-1} \mu_n \alpha_{n+1}\right) \frac{q_k}{p_k} + \lambda \eta l - \gamma l = 0, \quad (11a)$$

for $k = 1, 2, \dots, k_1$

$$\left(1 - \frac{\mu_1}{t}\right) \frac{q_k}{p_k} + \lambda \eta l - \gamma l = 0, \quad (11b)$$

for $k = k_1 + 1, k_1 + 2, \dots, k_2$

$$\vdots$$

$$\left(1 - \frac{\mu_{N-1}}{t}\right) \frac{q_k}{p_k} + \lambda \eta l - \gamma l = 0, \quad (11c)$$

for $k = k_{N-1} + 1, k_{N-1} + 2, \dots, N$

The equation in (8) suggests two cases: either $\gamma = 0$, or $tPT - \sum_{k=1}^K y_k = 0$. The first implies that the solution of the optimization problem lies inside the power constraint plane $tPT - \sum_{k=1}^K y_k = 0$. The second implies that the solution lies on the power constraint plane.

Case I: $\gamma = 0$

Equations (11a) - - (11c) show that the quantity p_{k+1}/h_k remains constant for all subcarriers assigned to a particular user. That is, each user has his own water level. Denoting User- n 's water level by w_n ,

$$p_{k+1}/h_k = w_n, \text{ for } k = k_{n-1} + 1, k_{n-1} + 2, \dots, k_n \quad (12)$$

For $n = 1, 2, \dots, N$.

Equations (10) - - (12) can be used to show that

$$f = \frac{\sum_{n=1}^N \alpha_n}{\ln 2 \sum_{n=1}^N \alpha_n w_n} \quad (13)$$

Furthermore, letting

$$\beta_{n+1} = \frac{\left[\prod_{k=1}^{k_1} h_k\right]^{\frac{\alpha_{n+1}}{K_n}}}{\left[\prod_{k=k_n+1}^{k_{n+1}} h_k\right]^{\frac{1}{K_n}}} \text{ for } n = 1, 2, 3, \dots, N - 1,$$

$$\gamma_{n+1} = \frac{K_1 \alpha_{n+1}}{K_n} \text{ for } n = 1, 2, 3, \dots, N - 1,$$

The relationship between the various water levels dictated by (7) can be succinctly written as:

$$w_n = \beta_n w_{n-1} \text{ for } n = 2, 3, 4, \dots, N. \quad (14)$$

After defining $\beta_1 = \gamma_1 = 1$, (13) can be re-written using w_1 alone as:

$$F(w_1) = f(w_1, \beta_2 w_1^{\gamma_2}, \beta_3 w_1^{\gamma_3}, \dots, \beta_N w_1^{\gamma_N})$$

$$- \frac{\sum_{n=1}^N \alpha_n}{(\ln 2) \sum_{n=1}^N \alpha_n \beta_n w_1^{\gamma_n}} = 0 \quad (15)$$

The fact that (5) is a concave optimization problem implies that the above non-linear equation $F(w_1) = 0$ has a unique solution. Nevertheless, it is possible to prove the

existence and uniqueness of the solution independently. An outline is as follows: Notice that $F(w_1)$ is continuous when $w_1 > 0$. It can be shown $\lim_{w_1 \rightarrow 0^+} F(w_1) = -\infty$ and $\lim_{w_1 \rightarrow \infty} F(w_1) = +\infty$. Hence, by Intermediate Value Theorem, $F(w_1) = 0$ has at least one positive solution. Suppose that $F(w_1) = 0$ has two positive solutions. Since $F(w)$ is differentiable for $w_1 > 0$, by Rolle's Theorem, $F'_-(w_1) = 0$ for some $w_1 > 0$. However, from (15) it can be shown that $F'_-(w_1) > 0$ for all $w_1 > 0$. After finding the optimum water level w_1^* for User-1 by solving (15) for w_1 , optimum water levels w_n^* for the other users can be calculated using (14). From the water levels, the power levels p_k^* that maximize the total EE can be calculated using (12). This will form a legitimate solution, only if the power levels p_k^* satisfies the inequality in (8). If the p_k^* values obtained do not satisfy (8), we go to case II.

Case II: $tPT - \sum_{k=1}^K \gamma_k = 0$:

This is the case where the solution lies on the plane

$\sum_{k=1}^K p_k = PT$. This makes the denominator of the objective function a constant and hence, our optimization problem reduces to the following.

$$\max_p \sum_k \log_2(1 + h_k p_k)$$

Subject to

$$\sum_k p_k = P_T$$

This is the familiar OFDMA throughput maximization problem, for which we know the solution:

$$p_k = p_k^{**} = \left[w^{**} - \frac{1}{h_k} \right]^+, \quad \text{where } w^{**} = \frac{P_T}{K} + \frac{1}{K} \sum_k \frac{1}{h_k} \quad (16)$$

The results of the analysis are now summarized into a power allocation procedure.

Power Allocation Procedure

- 1) Solve (15) and obtain User-1's water level w_1^* , and then w_n^* and p_k^* from (14) and (12).
- 2) If $\sum_{k=1}^K p_k^* \leq P_T$ then $p_k = p_k^*$ for all k .

Else $p_k = p_k^{**}$ for all k , where p_k^{**} is given by (16).

D. Convergence and Complexity

We will use the well-known result that sorting an array of n elements takes, at worst, a time in the order of $n \log_2 n$. Our sub-channel assignment protocol starts by sorting the users according to their rate requirements, and then sorting each row and column of the channel matrix according to the gain. This would take a time in the order of $N \log_2 N + NK \log_2 K + KN \log_2 N$. In the worst case scenario, we will need K/N iterations of the outer loop to assign all sub-channels. This shows that the algorithm for the sub-channel assignment protocol will converge and the complexity is $NK \log_2 K + (K+1)N \log_2 N + K/N$. Since $K \gg N$, this reduces to $O(NK \log_2 K)$. The problem

with the convergence of the algorithms in the literature usually comes from the power allocation part [6]. Our power allocation procedure only need to solve a single non-linear equation, regardless of the number of users in the system. In other words, it has constant time complexity and there are extremely efficient solvers that accomplish this in few iterations [9]. Thus, the resource allocation algorithm converges and has complexity $O(NK \log_2 K)$. It should be noted that the algorithm in [6] uses minimum rate constraints as opposed to our proportional rates, and that algorithm also has the same complexity as ours. The algorithm in [6] is based on bi-level optimization, uses an approximate estimate of the EE, and more importantly, the convergence of that algorithm is not proven.

Numerical Results

The details of the simulation parameters are given in Fig. 1. The power solutions obtained from these simulations fell well within the respective maximum total power constraints. In other words, the solutions came from Case-I of the last section. For one realization of the first scenario, the solution of the equation in (15) was found to be 2.5milliWatts. This produces a maximum system EE of 267.5 bits/Joule/Hz. Note that all the EE values reported here are the system EE over all the sub-channels of a particular scenario per unit bandwidth of each sub-channel. The total transmission rate of each user over all the sub-channels allocated to it and the total power expenditure of each user at the maximum EE are shown in Table I. The transmission rates as ratios of User-1's rate show the proportional rate demands being satisfied.

Since the bi-level optimization based algorithm in [6] and our algorithm use different types of rate constraints, a direct comparison is not possible. We modified these two algorithms to ignore the rate demands and used the second scenario in Fig. 1 to compare them. Fig. 2 shows our algorithm out-performing the one in [6]. For each cell radius, the EE values shown are the averages from 50 random placements of the users. Scenario-3 is used to investigate the variation of the system EE with the number of users when the number of sub-channels is fixed at three different values. The results are shown in Fig. 3. Each point in the graph is obtained by averaging the EE values from 50 random placements. There is a slight decrease in EE with increasing number of users. This can be explained by the decrease in the effectiveness of the channel assignment protocol with the decrease in the sub-channel to user ratio. The EE decreases because the channel assignment protocol has lesser and lesser channels per user to work with.

Table I: Scenario 1: Power Levels & Transmission Rates at the maximum EE

User Number	1	2	3	4
Power level(mW)	20.3	10.3	9.5	3.7
Transmission rate (bits/s/hz)	20.68	17.54	11.45	8.38
Transmission rate/User-1's rate	1.00	0.80	0.60	0.40

<p>Users were placed randomly within a cell radius R.</p> <p>Raleigh fading and log-normal shadowing were superimposed on the channel gains obtained from the distance to the transmitter using a path loss coefficient of 4.</p>	
SCENARIO - 1:	<p>N = 4 Users K=32 subchannels R = 400 m</p> <p>Proportional rate requirement: $r_1 : r_2 : r_3 : r_4 = 1.0 : 0.8 : 0.6 : 0.4$</p>
SCENARIO - 2:	<p>N = 6 Users K=60 subchannels R varied from 300 m to 1000 m</p> <p>No rate requirements.</p>
SCENARIO - 3:	<p>R = 400 m K = 32, 64, 128</p> <p>N=4 $r_1 : r_2 : r_3 : r_4 = 1.0 : 0.8 : 0.6 : 0.4$</p> <p>N=8 $r_1 : r_2 : r_3 : r_4 : r_5 : r_6 : r_7 : r_8 = 1 : 1 : 0.8 : 0.8 : 0.6 : 0.6 : 0.4 : 0.4$</p> <p>N=12 $r_1 : r_2 : r_3 : r_4 : r_5 : r_6 : r_7 : r_8 : r_9 : r_{10} : r_{11} : r_{12} = 1 : 1 : 1 : 0.8 : 0.8 : 0.8 : 0.6 : 0.6 : 0.6 : 0.4 : 0.4 : 0.4$</p> <p>N=16 $r_1 : r_2 : r_3 : r_4 : r_5 : r_6 : r_7 : r_8 : r_9 : r_{10} : r_{11} : r_{12} : r_{13} : r_{14} : r_{15} : r_{16} = 1 : 1 : 1 : 1 : 0.8 : 0.8 : 0.8 : 0.8 : 0.6 : 0.6 : 0.6 : 0.6 : 0.4 : 0.4 : 0.4 : 0.4$</p>

Figure 1: Simulation Results

Conclusion

A two-step solution to the problem of finding the power and frequency allocation that maximizes the bits/Joule/Hz energy efficiency of the OFDMA based downlink transmissions from a base station with proportional rate constraints was presented. The complexity of the algorithm proposed was the same as that of the best algorithm in the literature for the same problem but with minimum constraints. While the algorithm in the literature is not guaranteed to converge, the algorithm proposed in this paper is proven to converge.

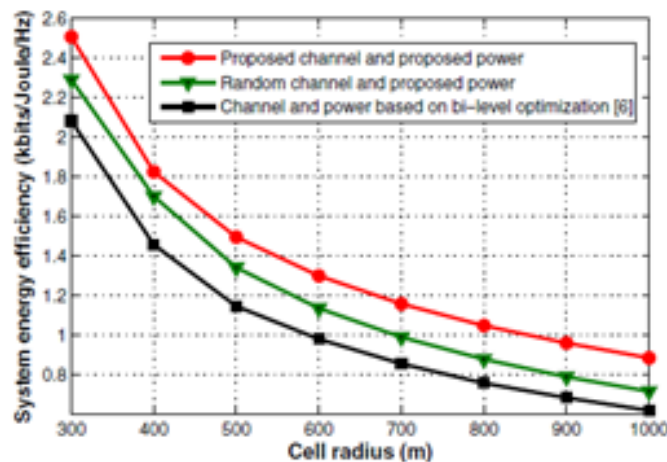


Figure 2: Scenario-2 Variation of the maximum EE with Cell radius

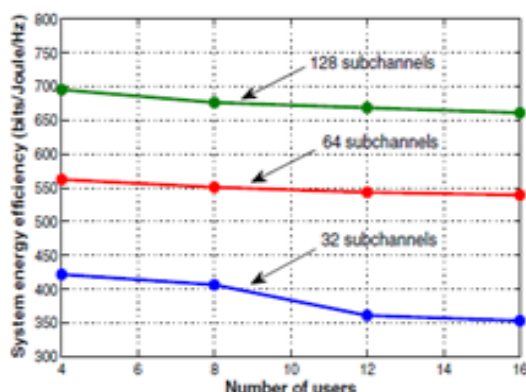


Figure 2: Scenario-3- Variation of the maximum EE with Number of Users

References

- [1] A Fehske, G. Fettweis, J. Malmudin, and G. Biczak, 2011 "The global footprint of mobile communications: the ecological and economic perspective," *IEEE Commun. Mag.*, pp.55-62.
- [2] A. Akbari, R. Hoshyar, and R. Tafazolli, 2010 "Energy-efficient resource allocation in wireless OFDMA systems," in *Proc. 2010 IEEE International Symposium on Personal, Indoor and Mobile Radio Communications*, pp. 1731-1735.
- [3] R. S. Prabhu and B. Daneshrad, 2010, "An energy-efficient water-filling algorithm for OFDM systems," in *Proc. 2010 IEEE International Conference on Communications*, pp. 1-5.
- [4] C. Isheden and G. P. Fettweis, 2010, "Energy-efficient multi-carrier link adaptation with sum rate-dependent circuit power," in *Proc. IEEE Global Communications Conference*, pp. 1-5.
- [5] G. Miao, N. Himayat, and G. Y. Li, 2010, "Energy-efficient link adaptation in frequency-selective channels," *IEEE Trans. Commun.*, vol. 58, no. 2, pp. 545-554.
- [6] C. Xiong, G. Y. Li, S. Zhang, Y. Chen, and S. Xu, 2011, "Energy-efficient resource allocation in OFDMA networks," *IEEE Transactions on Communications*, vol.60, no.12, pp. 3767-3778.
- [7] G. W. Miao, N. Himayat, G. Y. Li, and S. Talwar, 2012 "Low-complexity energy-efficient scheduling for uplink OFDMA," *IEEE Trans. Commun.*, vol. 60, no. 1, pp. 112-120.
- [8] M. Avriel, W. E. Diewert, S. Schaible, and I. Zhang, *Generalized Concavity*. SIAM Publications, 2010.
- [9] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge University Press, 2004.

